

## Hybriseal® Façade

### How to order

Hybriseal® Façade is available in 310 ml cartridges and 600 ml sausages packed per 12 in a box. To order your specific Hybriseal® Façade, please find below the article and EAN codes:

### 310 ml cartridge

Colour:	Article code:	EAN code:
White	12002233	8711595167550
Concrete Grey	12001680	8711595163248

### 600 ml sausages

Colour:	Article code:	EAN code:
White	12001667	8711595163101
RAL 1013	12003791	8711595163101
Light Beige	12001666	8711595163088
Dark Beige	12001665	8711595163064
Dark Brown	12003705	8711595176774
RAL 7030	12001668	8711595163125
Concrete Grey	12001669	8711595163149
Middle Grey	12001670	8711595163163
Dark Grey	12001671	8711595163187
Basalt	12001672	8711595163200
Black	12001673	8711595163224



## Centre of Excellence


### Better results through Knowledge

Den Braven 's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!



Den Braven

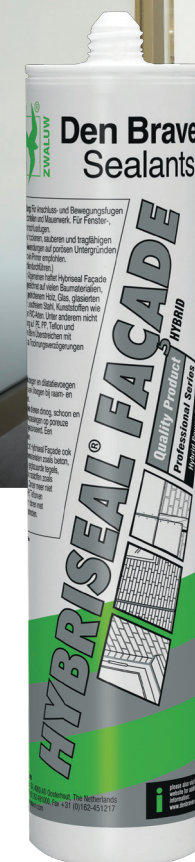

## Hybriseal® Façade

Versatile one component sealant for facade joints

denbraven.com

BETTER RESULTS THROUGH KNOWLEDGE



# Hybriseal® Façade

Versatile one component sealant for facade joints

- Special formulation for façade joints
- Certified also for pedestrian walkways according EN 15651-4
- Bubble free
- No shrinkage
- Free of isocyanates and silicones
- Low modulus and highly elastic
- Good resistant to UV, water and weather




## Hybriseal® Façade

### Product Descriptions

Hybriseal® Façade is a versatile one component hybrid based sealant with a low modulus for sealing building joints.

### Applications

Hybriseal® Façade is used for expansion and connection joint sealing to precast concrete, brickwork and masonry, perimeter pointing and wall sealing. In general Hybriseal® Façade has a good adhesion, also without primer, to concrete, brickwork, painted wood, glass, glazed substrates, aluminium, steel, stainless steel, plastics like polyester and most uPVC.

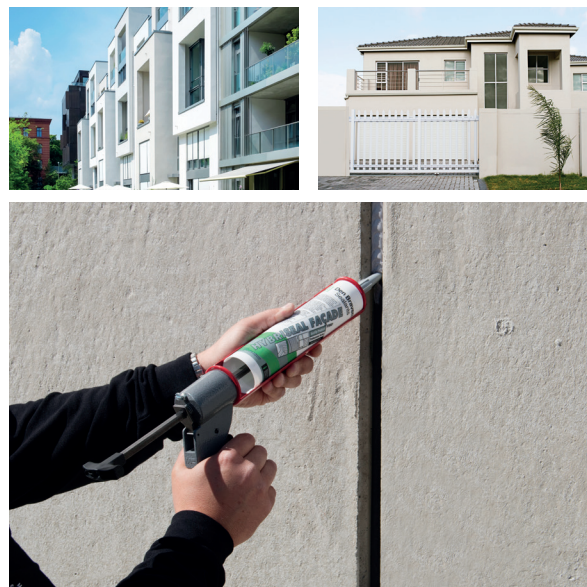

## Hybriseal® Façade

### Certifications

EN 15651-1: F-EXT-INT-CC 25LM  
EN 15651-4: PW-EXT-INT-CC 25LM  
SNJF F25A

### Technical Performances

Density	1,35 g/ml
Shore-A hardness	25°
Elongation at break	350%
Tensile strength	0,50 Mpa
Skin formation	90 minutes
Curing time	2,5 mm/day

Visit our website to download the full technical specifications of the Hybriseal® Façade.



### Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the USP movie of the original Hybriseal® Façade:

