
Acryl-W

How to order

Acryl-W is available in 310 ml cartridges packed per 12 in a box. To order your specific Acryl-W, please find below the article and EAN codes:

Colour:	Article code:	EAN code:
White	10041501	8711595087261
Grey	10013601	8711595087278
Braun	10024201	8711595087285
Black	10052301	8711595087292

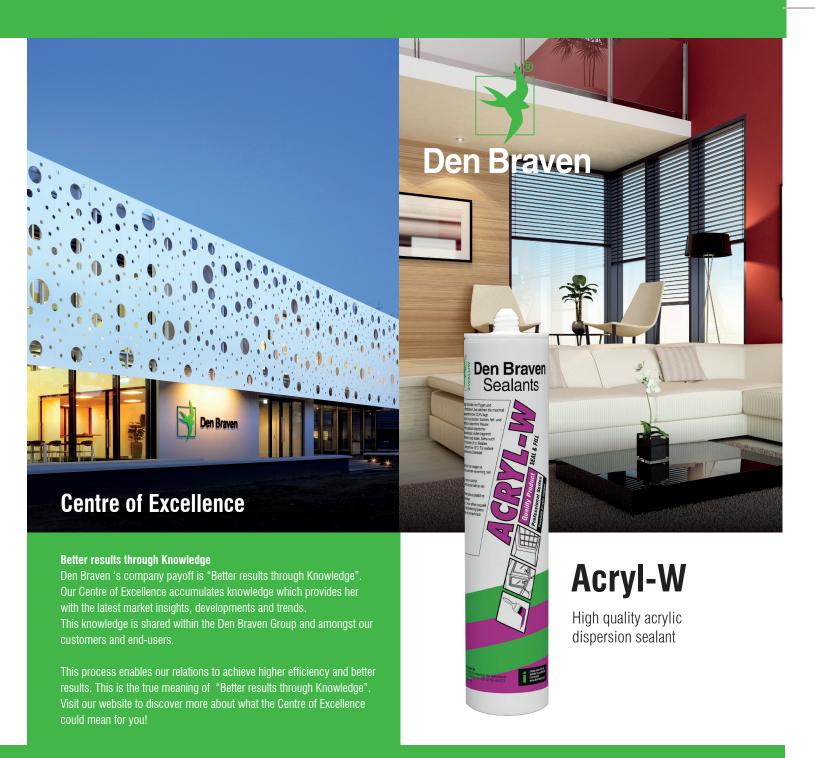

denbraven.com

BETTER RESULTS THROUGH KNOWLEDGE



Acryl-W

Product Descriptions

Acryl-W is a high quality acrylic dispersion sealant. After application the product forms a soft plasto-elastic rubber by evaporation of water from the sealant.

Applications

Acryl-W has been especially developed for sealing connection joints between stairs, walls, ceilings, skirting boards, windowsills, wooden, concrete and brickwork. In- and outside* applicable.

*Exterior applications only in good dry weather conditions for at least 5 hours after application.

Acryl-W

Certifications

EN 15651-1: F-EXT-INT 12,5P

Technical Performances

Density 1,71 g/ml
Shore-A hardness 30°
Elongation at break 240%
Skin formation 7 minutes

Visit our website to download the full technical specifications of the Acryl-W.









Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the USP movie of the original Acryl-W:



denbraven.com