

Acryl Anti-Crack

How to order

Acryl Anti-Crack is available in 310 ml cartridges packed per 12 in a box. To order your specific Acryl Anti-Crack, please find below the article and EAN codes:

Colour:	Article code:	EAN code:
White	11615201	8711595122580

UCA®-Technology

The compatibility of sealants with paint is ensured by our unique and proven UCA®-Technology. UCA stands for Unique Compatibility Additives. Den Braven sealants with the UCA-logo offer the best possible compatibility between sealants and paint due to selected raw materials, specialized additives and dedicated R&D and testing facilities.

Paint Cracking and bleeding

A typical painters problem is cracking of paint. Cracking is a distortion of the film and shows long cracked lines or a pattern of small cracks (mud-cracking). Cracking is a problem in the finishing process and is not easy to solve afterwards, generating delay and additional costs. Dark spots or surface discoloration in the paint at and around the painted sealant joint is called bleeding. Solving the occurrence of bleeding is highly time- and material consuming and therefore very costly. Bleeding is a problem which occurs mainly with acrylic based sealants. It is caused by non-compatibility between paint and sealant. Acryl Anti-Crack is developed to prevent migration between paint and sealant. This is able due to careful selection of raw materials and the addition of compatibility promoters. Our sealants with UCA®-Technology offer the highest guarantee to prevent bleeding.



Centre of Excellence

Better results through Knowledge

Den Braven's company payoff is "Better results through Knowledge". Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of "Better results through Knowledge". Visit our website to discover more about what the Centre of Excellence could mean for you!

denbraven.com


Den Braven



Acryl Anti-Crack

Unique water based acrylic sealant that prevents cracking in paint


BETTER RESULTS THROUGH KNOWLEDGE

Acryl Anti-Crack

Unique water based acrylic sealant that prevents cracking in paint



- Prevents paint crackle
- No bleeding in paint
- Pure white
- Easy to apply
- Easy tool ability

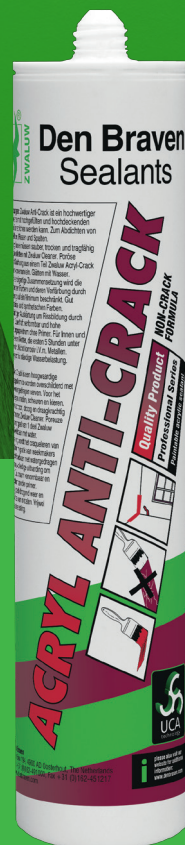

Acryl Anti-Crack

Product Descriptions

Unique water based acrylic sealant prevents cracking in paint with UCA® Technology. Acryl Anti-Crack is a high quality plasto elastic sealant based on an acrylic dispersion, permitting to be overpainted with opaque or high solid dispersion paints. Due to its unique composition crack building of the paint is reduced to a minimum.

Applications

Acryl Anti-Crack has been especially developed for sealing connection joints between stairs, walls, ceilings, skirting boards, windowsills, wooden and metal window frames, concrete and brickwork. For filling cracks, screw- and nail holes in walls and ceilings of wood, plastering, gypsum, concrete and brickwork.



Acryl Anti-Crack

Certifications

EN 15651-1: F-EXT-INT 7,5P

Technical Performances

Density	1,61 gr/ml
Shore-A hardness	40°
Elongation at break	200%
Tensile strength	0,70 Mpa
Skin formation	10 minutes

Visit our website to download the full technical specifications of the Acryl Anti-Crack.



Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the USP movie of the original Acryl Anti-Crack:

