



Den Braven



APPLICATION GUIDELINES

Zwaluw FireProtect FP Hybrid Sealant

FP Hybrid Sealant can easily be applied with a professional caulking gun.

Situation A: Single or double sided sealing of horizontal and vertical joints with FP Hybrid Sealant



1. Clean from dust with a soft brush and remove loose particles. When needed pre-treat the joints with a primer for porous substrates.



2. Place backer rod at the right depth.
Jointwidth/3 + 6 mm = joint depth
Example: 15mm/3 = 5+6mm = 11mm depth



3. Apply FP Hybrid Sealant to the backer rod and make sure the joint is completely filled with material.



Den Braven



4. Finish the joint with a spatula or fingers moistened with Zwaluw Mixed Finisher.



5. Repeat steps 1 to 4 on the other side when the joint needs to be sealed on both sides.
6. The joint is now fire retardant and securely sealed with.




Den Braven



Zwaluw FireProtect FP Hybrid Sealant

FP Hybrid Sealant can easily be applied with a professional caulking gun.

Situation B: Fill joint partly with FP PU Foam and finish with FP Hybrid Sealant

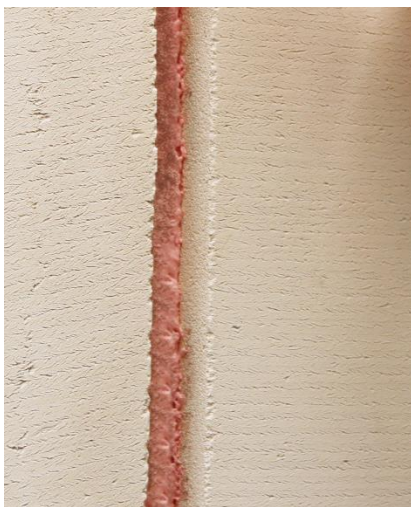


1. See application guidelines for FP PU Foam to apply the foam recessed, with result as beside picture.



2. Apply FP Hybrid Sealant to the cured FP PU Foam and make sure the joint is completely filled with material.



Den Braven

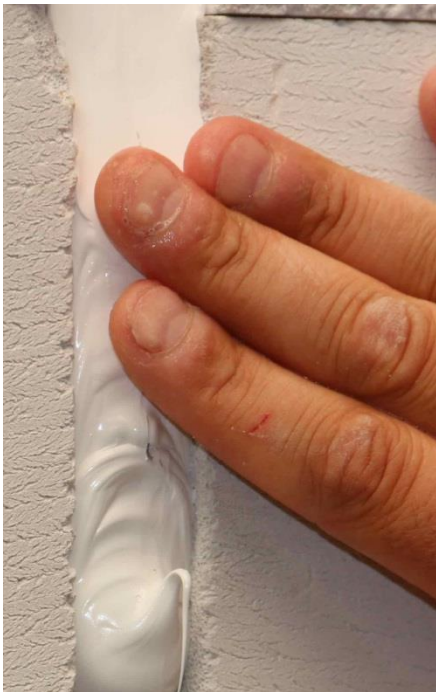

3. Finish the joint with a spatula or fingers moistened with Zwaluw Mixed Finisher.



4. The joint is now fire retardant and securely sealed with FP PU Foam and FP Hybrid Sealant.



Den Braven



Den Braven

Denariusstraat 11 | 4903 RC Oosterhout | P.O. Box 194 | 4900 AD Oosterhout | The Netherlands
T +31 (0)162 - 491 000 | F +31 (0)162 - 451 217 | E info@denbraven.com | www.denbraven.com