

Repox®Fast

How to order

Repox®Fast fast is available in 250 ml cartridges packed per 6 in a box. To order your specific RepoX®Fast, please find below the article and EAN codes:

Colour:	Article code:	EAN code:
Grey	210033	8711595126441

Product Descriptions

1. Make sure that the cartridge has always a temperature of at least + 10°C
2. Apply RepoX®Fast with a professional caulking gun
3. Gun out the first material RepoX®Fast outside the restoration area till an homogeneous colour and mass is reached
4. Use a stainless steel putty knife (steel is abrasive and stainless steel is smoother)
5. Remove the rotten wood and 20 mm extra until in the healthy wood to be sure that all the fungus has been removed
6. Apply enough RepoX®Fast to prevent air entrapment
7. The “B” component contains Amine when packed in the cartridge – when cured the product can be classified as harmless garbage
8. Minimum layer thickness should be 3 mm
9. Arrange a minimum angle of the removed wood to the front side of the surface of at least 65° en 90°
10. Work neat but not too precise RepoX®Fast is easy to sand, use a sanding paper 180 – 200



Centre of Excellence

Better results through Knowledge

Den Braven 's company payoff is “Better results through Knowledge”. Our Centre of Excellence accumulates knowledge which provides her with the latest market insights, developments and trends. This knowledge is shared within the Den Braven Group and amongst our customers and end-users.

This process enables our relations to achieve higher efficiency and better results. This is the true meaning of “Better results through Knowledge”. Visit our website to discover more about what the Centre of Excellence could mean for you!




Den Braven



RepoX®Fast

Two component wood repair system for smaller repairs based on epoxy resin


denbraven.com

BETTER RESULTS THROUGH KNOWLEDGE

Repos® Fast

Two component wood repair system for smaller repairs based on epoxy resin

- 2 component solvent free epoxy
- Permanent elasticity \pm 8%
- For repairing nail and screw holes
- Minimum 3 mm up to 20 mm
- No shrinkage
- Sandable after 30-60 minutes
- Paintable after 60 minutes
- No primer needed
- 365 days applicable
- both outside and inside applicable

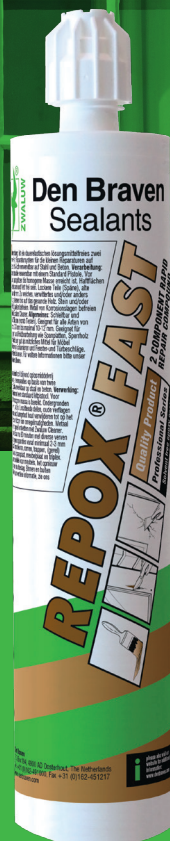

Repos® Fast

Product Descriptions

Repos® Fast is a permanently elastic solvent free, low odour, two component wood repair system for smaller repairs based on epoxy resin.

Applications

Repos® Fast has been specially developed for repairing nail and screw holes, knots and tears in longitudinal direction and other defects of the wood. Repos® Fast could be applied if you must paint within 30 till 60 minutes. Suitable for all types of repairs of a minimum of 2-3 mm till 15-20 mm. Applicable to doors, window frames, stairs and (Façade) sheet material such as chipboard, furniture plate and plywood. Also good usable as repair compound for furniture mounting hinges and window and door fittings. Both outside and within applicable.



Repos® Fast

Certifications

COT LAB12-0118

Technical Performances

Density	1,30 g/ml
Shrinkage	0%
Sand able	30-60 minutes
Paintable	> 60 minutes

Visit our website to download the full technical specifications of the Repos® Fast.



Visit Den Braven YouTube channel

Den Braven offers a wide variety of USP, Application and Commercial movies via here website and YouTube channel. Scan the below displayed QR Code to visit the product page of the original Repos® Fast:



BETTER RESULTS THROUGH KNOWLEDGE

denbraven.com